(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 20 January 2005 (20.01.2005)

PCT

(10) International Publication Number WO 2005/005831 A1

(51) International Patent Classification⁷: F03G 7/08

F04B 35/00,

(21) International Application Number:

PCT/IB2004/002219

(22) International Filing Date:

6 July 2004 (06.07.2004)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

CA2003A000004

9 July 2003 (09.07.2003) I

CA2004A000004

30 March 2004 (30.03.2004) IT

(71) Applicant and

(72) Inventor: ERRIU, Fernando [IT/IT]; Loc. Pranu Mois, I-09040 San Basilio (IT).

(74) Agent: JORIO, Paolo; Studio Torta S.r.l., Via Viotti, 9, I-10121 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims and statement

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A FLUID DEVICE FOR RECOVERY OF THE KINETIC ENERGY OF A VEHICLE

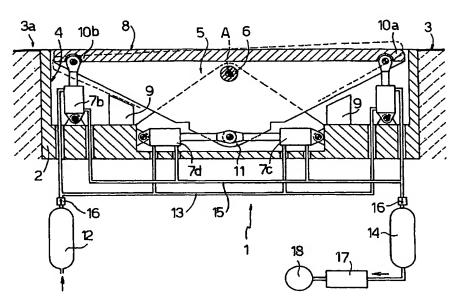

(57) Abstract: Described herein is a fluid device (1, 20, 40, 50, 60, 70, 90, 90', 90'') for the recovery of the kinetic energy of land vehicles, comprising an intake line (13), a delivery line (15), and a pumping unit (7, 21, 103), which is connected to the intake line (13) and to the delivery line (15), and at least one actuating element (5, 22, 44, 52, 62, 76, 108) set along a street or railroad course (3, 75) of an infrastructure (3a, 71) for the transit of vehicles, functionally connected to the pumping unit (7, 22) and mobile between a position of unloading and a position of loading, in which the actuating element (5, 22, 44, 52, 62, 76, 108) is designed to be surmounted by a vehicle travelling along the street or railroad infrastructure (3a, 71).